



PRO5
S E R I E S



D15S / D18S-5 & D20SC-5
G15S / G18S-5 & G20SC-5
3,000lb(1,500kg) 3,500lb(1,750kg)
4,000lb(2,000kg)
Diesel, LP, Gas, Pneumatic Tire



D20S / D25S / D30S / D33S-5 & D35C-5
G20E / G25E / G30E-5
G20P / G25P / G30P / G33P-5 & G35C-5
4,000lb(2,000kg) 5,000lb(2,500kg)
6,000lb(3,000kg) 6,500lb(3,250kg)
7,000lb(3,500kg)
Diesel, LP, Gas, Pneumatic Tire

Full Product Line

Doosan offers a full line of lift trucks from 3,000lb(1,500kg) to 36,000lb(16,000kg) to fill all your material handling needs. Contact your dealer for specific information on our various models and configurations.

Complete Distribution Network

Doosan lift trucks are sold and serviced by 95 dealers at over 200 locations in the U.S and Canada. Call us at 1-800-323-9662 for the location of a dealer near you, or visit us at www.doosanlift.com

For corporate information go to :
www.dhiac.com



Doosan Infracore
Forklifts

Pneumatic Forklift Trucks

D15S / D18S-5 & D20SC-5

G15S / G18S-5 & G20SC-5

D20S / D25S / D30S / D33S-5 & D35C-5

G20E / G25E / G30E-5

G20P / G25P / G30P / G33P-5 & G35C-5

3,000lb to 7,000lb Capacity

PRO5
S E R I E S



PSC0707A0 (July,2007)



Doosan Infracore
Forklifts

Doosan Infracore America Corporation
4350 Renaissance Parkway,
Warrensville Heights, Ohio, 44128 U.S.A.
Tel : 216-595-1212
Fax : 216-595-1214

AUTHORIZED DEALER

Product and specifications are subject to improvement and change without notice.

A Comfortable Operator Enhances Truck Performance

Our ergonomically designed and spacious operator compartment combined with a variety of operational enhancements will facilitate ease of operation and help boost output in any application.



DRIVE THE DIFFERENCE...

Operator Friendly Features Include:

● Spacious and Well Planned Operator compartment

Ample operator leg room, tiltable steering column and ergonomically positioned operator pedals combined with a low cowl height facilitate ease of operation.

● Integrated Instrument Panel

The centralized and integrated easy-to-read instrument panel maximizes operator efficiency. Fuel gauge, engine hour meter, engine oil pressure, coolant and transmission temperature, mast interlock, transmission neutral, seat belt, brake oil level indicator keeps operator aware and informed of all vehicle performance systems.

● Convenience Package

Handles refreshments, paperwork, small tools, etc. for operator efficiency.

● Auto Tilt Leveling (Optional)

Returns mast to upright vertical position with the push of a button.

● Operator Sensing System

- ✓ Parking alarm : Alarm warning when operator leaves the seat without applying parking brake
- ✓ Seat belt indicator : Seat belt warning light for 10 seconds reminds operator to fasten seat belt
- ✓ Neutral shift feature : Transmission is automatically shifted into neutral when the operator leaves the seat.

● Rear Grab Bar with Horn

When operator drives in reverse, rear grab bar enables horn activation to alert surrounding personnel.



DRIVE DOOSAN !


Proven Quality,
Responsive Service and
A Reliable Partner....

After sales servicing of Doosan forklifts is available from the selling dealership backed by Doosan’s own customer service center. And Doosan provides 100% parts inventory to insure any downtime is minimized. When you own a Doosan forklift, our high quality, responsive customer support team comes with it.

The Doosan network starts with your local dealer and ends with a national team of highly qualified and experienced personnel standing ready to support all your material handling needs.



DRIVE THE DIFFERENCE...

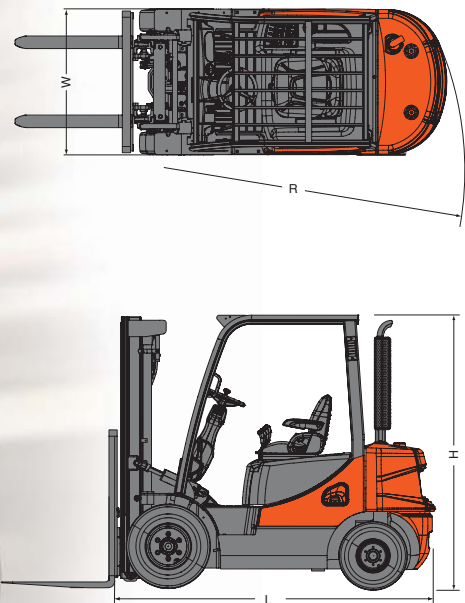

Option Availability

● : Standard ○ : Optional

Options	D15/18S-5 & D20SC-5	G15/18S-5 & G20SC-5	D20/25/30/33S-5 & D35C-5	G20/25/30E-5	G20/25/30/33P-5 & G35C-5
Drive in Rack Overhead Guard	○	○	○	○	○
Oil- Cooled Disc Brakes	○	○	●	●	●
Fuel Cap with Key	○	○	○	○	○
Precleaner	○	○	○	○	○
Vertical Exhaust Tube	●	○	●	○	○
Catalytic Muffler *	○	○	○	○	○
Modular Operator Cabin	○	○	○	○	○
Radiator Screen	○	○	○	○	○
Non Marking Tire(Solid)	○	○	○	○	○
Spark Arrestor(w/o Cabin)	n/a	n/a	○	n/a	n/a
Mono Pad Foot Direction and Acceleration Control	○	○	○	○	○
AutoShift (Single,Dual Tire)	○	○	○	○	○
Engine Shutdown	○	○	○	○	○
Swingout LP MTG	n/a	○	n/a	○	○
Swingdown LP MTG	n/a	○	n/a	○	○
Lift and Tilt Locking Hydraulic Control Valve	●	●	●	●	●
Auto Tilt Leveling	○	○	○	○	○
Rear Grab Bar with Horn	●	●	●	●	●
Quad Mast	n/a	n/a	○	○	○
Hydraulic Accumulator	○	○	○	○	○
Intergral Sideshifter	○	○	○	○	○
Intergral Shifting Fork Positioner	○	○	○	○	○
Hook on Sideshifter	○	○	○	○	○
UL LPS,DS Rating	○	○	○	○	○

* Catalytic muffler is standard for Tier-3 E/G only

Main Specification

Sales Model	D15S-5	D18S-5	D20SC-5	G15S-5	G18S-5	G20SC-5
Rated Load Capacity	3000(1500)	3500(1750)	4000(2000)	3000(1500)	3500(1750)	4000(2000)
Load Center	24(500)	24(500)	24(500)	24(500)	24(500)	24(500)
Overall Length to Fork Face	85.4(2170)	87.2(2215)	88.6(2250)	85.4(2170)	87.2(2215)	88.6(2250)
Truck Overall Width	42.1(1070)	42.1(1070)	42.1(1070)	42.1(1070)	42.1(1070)	42.1(1070)
Height of Overhead Guard	85.4(2170)	85.4(2170)	85.4(2170)	85.4(2170)	85.4(2170)	85.4(2170)
Minimum Turning Radius	77.8(1977)	79.6(2022)	80.7(2050)	77.8(1977)	79.6(2022)	80.7(2050)
Travel Speed, Loaded	11.8(19)	11.8(19)	11.8(19)	11.2(18)	11.2(18)	11.2(18)
Lifting Speed, Loaded	118(600)	118(600)	118(600)	118(600)	118(600)	118(600)
Engine Models	A2300			G420FE(LP)		
Rated Power of Engine	44(33)/2400			LP : 46(34)/2300		
Max Torque	110(15)/1600			113(15)/1600		
Displacements	2290			1975		

Sales Model	D20S-5	D25S-5	D30S-5	D33S-5	D35C-5	G20E-5	G25E-5
Rated Load Capacity	4000(2000)	5000(2500)	6000(3000)	6500(3250)	7000(3500)	4,000 (2,000)	5,000(2,500)
Load Center	24(500)	24(500)	24(500)	24(500)	24(500)	24 (500)	24(500)
Overall Length to Fork Face	99.6(2530)	102.2(2595)	106.3(2700)	107.5(2730)	108.9(2765)	99.6 (2,530)	102.2(2,595)
Truck Overall Width	46.1(1170)	46.1(1170)	47.1(1197)	47.1(1197)	49.4(1255)	46.1 (1,170)	46.1(1,170)
Height of Overhead Guard	85.9(2183)	85.9(2183)	85.9(2183)	85.9(2183)	85.9(2183)	85.9 (2,183)	85.9 (2,183)
Minimum Turning Radius	87.4(2220)	89.2(2265)	93.1(2365)	94.3(2395)	95.3(2420)	87.4 (2,220)	89.1(2,265)
Travel Speed, Loaded	12.1(21)	12.1(21)	11.2(20)	11.2(20)	11.8(20.5)	11.8 (19)	11.8(19)
Lifting Speed, Loaded	108.3(530)	104.3(520)	102.3(500)	98.4(490)	82.7(480)	104.3 (530)	100.4(510)
Engine Models	4TNV98					G420FE	
Rated Power of Engine	62.1(46.3)/2,200					53.5 (39.9) / 2,550	
Max Torque	177(240)/1,320					157/1,600	
Displacements	3,319					1,975	

Sales Model	G30E-5	G20P-5	G25P-5	G30P-5	G33P-5	G35C-5
Rated Load Capacity	6,000(3,000)	4000(2000)	5000(2500)	6000(3000)	6500(3250)	7000(3500)
Load Center	24(500)	24(500)	24(500)	24(500)	24(500)	24(500)
Overall Length to Fork Face	106.3(2,700)	99.6(2530)	102.2(2595)	106.3(2700)	107.5(2730)	108.9(2765)
Truck Overall Width	85.2(1,197)	46.1(1170)	46.1(1170)	47.1(1197)	47.1(1197)	49.4(1255)
Height of Overhead Guard	85.9(2,183)	85.9(2183)	85.9(2183)	85.9(2183)	85.9(2183)	85.9(2183)
Minimum Turning Radius	93.1(2,365)	87.4(2220)	89.2(2265)	93.1(2365)	94.3(2395)	95.3(2420)
Travel Speed, Loaded	11.2(18)	11.8(19)	11.8(19)	11.2(18)	11.2(18)	11.5(18.5)
Lifting Speed, Loaded	98.4(500)	104.3(530)	100.4(510)	98.4(500)	98.4(500)	82.7(420)
Engine Models	G420FE		G424FE(LP)			
Rated Power of Engine	53.5(39.9)/2,550		64(47.7)/2,550			
Max Torque	157/1,600		135(182)/2,200			
Displacements	1,975		2,405			

DRIVE DOOSAN !